


NP2RX

# 1/4" PROFESSIONAL PHONE PLUG, 2 POLES, 90° ANGLED, NICKEL CONTACTS, NICKEL SHELL

---

The heavy duty professional phone plug series improves on the design of the existing C series by offering the thinnest available A-gauge 1/4" plug with unique Neutrik chuck type strain relief on the market. The slimline shell with a width of 14.5 mm meets the most recent requirements for highest density jackfields (15.88mm jack pitch). The precise machined one-piece tip contact without rivets makes it unique and avoids hook up in a socket or break off the tip. The Plug X Series serves all applications such as guitar applications, audio cables, snakes, speakers, amplifiers and mixing desks.

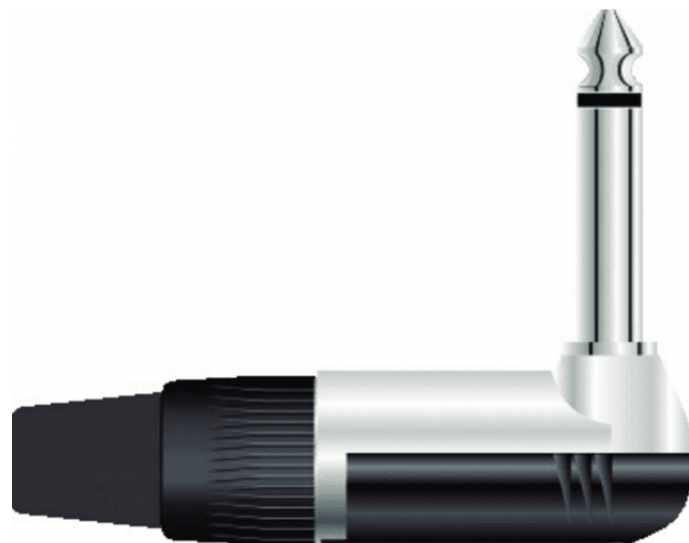

NP2RX

# 1/4" PROFESSIONAL PHONE PLUG, 2 POLES, 90° ANGLED, NICKEL CONTACTS, NICKEL SHELL

## PRODUCT DETAILS

### KEY FEATURES

Extra slim 1/4" plug for highest packing density, 90° angle

Robust diecast shell in stylish design

Proven chuck type strain relief for reliable cable retention

Sleek design for best handling convenience

Precision machined one-piece contacts - avoid hook up of tip contact

### SPECIFICATIONS

<b>Connection Type</b>	90° angled plug
<b>Gender</b>	male
<b>Contact resistance</b>	depends on mating connector mW (inner)
<b>Dielectric strength</b>	1 kVdc
<b>Insulation resistance</b>	> 2 GOhm
<b>Rated current per contact</b>	depends on mating connector
<b>Rated voltage</b>	50 V
<b>Cable Diameter</b>	4 - 7 mm
<b>Lifetime</b>	> 1000 mating cycles
<b>Wiring</b>	Solder contacts
<b>Contact plating</b>	2 µm Ni (Su)
<b>Contacts</b>	Brass

NP2RX

# 1/4" PROFESSIONAL PHONE PLUG, 2 POLES, 90° ANGLED, NICKEL CONTACTS, NICKEL SHELL

---

<b>Insert</b>	Polyamide (PA 6.6 30 % GR)
<b>Shell</b>	Zinc diecast
<b>Shell plating</b>	Nickel
<b>Strain relief</b>	Polyacetal (POM)
<b>Temperature range</b>	-20 °C to +65 °C