


SC92BK015GD

X-LEAD SC92GD SERIES SPEAKER CABLE, SPEAKON 4 POLES FEMALE - XLR 3 POLES MALE / 1.5 MT

These twinaxial speaker cable lines are a valid product to connect speaker systems with long cable run and large conductor areas or shorter bridge cables with lower power requirements. The section of 1.0 mm² satisfies a wide range of requirements. It is supplied with robust PE insulation and a flexible PVC jacket suitable to all sort of applications.

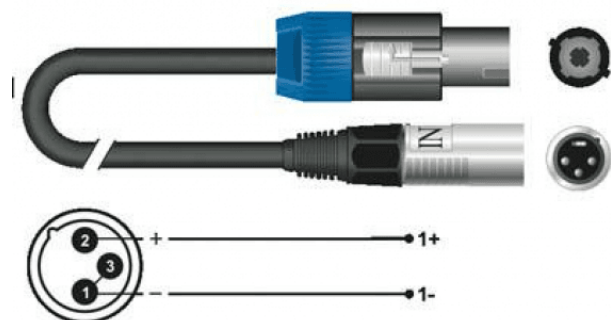

-  SPK4M Neutrik Connector
-  BC82 - BC84 SPK Speaker Cable
-  SP61XNM NEUTRIK 3 Pin XLR Connector, Male Plug

SC92BK015GD

X-LEAD SC92GD SERIES SPEAKER CABLE, SPEAKON 4 POLES FEMALE - XLR 3 POLES MALE / 1.5 MT

PRODUCT DETAILS

KEY FEATURES

Connectors: Speakon 4 poles female SPK4M / XLR 3 poles male SP61XNM INCO

Twinaxial BC82SPK speaker cable

Wire area: 1.00 mm²

Cable diameter: 7.0 mm

PVC jacket

PE insulation grants very low capacity

Flexible, easy winding

Application: live, studio

Length: 1.5 mt

SPECIFICATIONS

Wire area 1.00 mm²

Cable diameter 7.0 mm

PVC jacket

Connectors Speakon 4 poles female SPK4M / XLR 3 poles male SP61XNM INCO