




XPRS-1182S

## 18" REFLEX LOADED ACTIVE SUBWOOFER

### Versatile XPRSion


The XPRS2 Series couples the versatility and mobility of the original XPRS Series with elevated sound-performance and audio intelligibility to deliver a high-caliber speaker system for mobile DJs, live sound, houses of worship, rental and fixed installations.



XPRS-1182S

# 18" REFLEX LOADED ACTIVE SUBWOOFER

## HIGHLIGHTS

**CLASS D AMPLIFIER**

### POWERFUL CLASS D AMPLIFICATION

The **XPRS2** Series employs **Class D** Amplification with high output wattage for a powerful and premiere audio experience for performers and listeners alike. The XPRS102 and XPRS122 full-range speakers feature Class D 2000 W amplification, while the XPRS1152S and XPRS1182S subwoofers offer Class D 4000 W amplification.


### HIGH QUALITY, ROBUST BUILD

Pioneer DJ's all-new XPRS2 Series features a sleek all-black, protective pollywood cabinet for performance in harsh outdoor and indoor environments. The series models all come with a durable handle to support system portability and handling during setup and take down. The XPRS2 Series also features rubber feet to create separation and shock absorption between surfaces.



XPRS-1182S

# 18" REFLEX LOADED ACTIVE SUBWOOFER

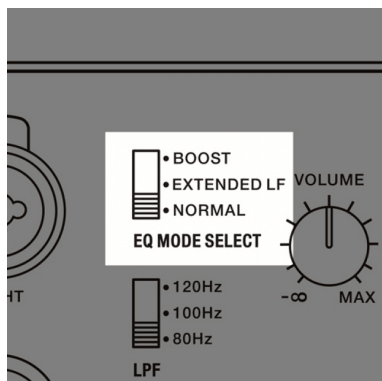

## THREE DSP MODES

Both of the XPRS2 subwoofers contain three different DSP preset modes—Boost, Extended LF, and Normal—to suit different listening environments.

XPRS-1182S

# 18" REFLEX LOADED ACTIVE SUBWOOFER

## PRODUCT DETAILS

### KEY FEATURES

Powerful Class D Amplification

High Quality, Robust Build

Three DSP Modes

Accurate Audio Performance / Frequency Response

### SPECIFICATIONS

<b>Type</b>	18 inch active subwoofer
<b>Amplifier Output</b>	Class D 4000W peak
<b>Supported voltages</b>	110 V to 240 V (50 Hz/60 Hz)
<b>Power consumption</b>	800 W
<b>Frequency Range</b>	40 – 120 Hz
<b>DSP modes</b>	EQ Mode Select - 3 DSP Preset Modes(Switch), LPF, POLARITY
<b>DSP presets modes</b>	BOOST, EXTENDED LF, NORMAL
<b>Maximum Sound Pressure</b>	130 dB
<b>Inputs</b>	Left Mono (Combo), Right (Combo)
<b>Outputs</b>	Left Mono (XLR), Right (XLR)
<b>Driver</b>	18" ferrite LF cone driver
<b>Finish</b>	Black paint, Rubber feet
<b>Handle</b>	2 metal handles (on left side and top)
<b>Pole socket</b>	35 mm socket
<b>Enclosure</b>	Plywood (TSCA)

XPRS-1182S

# 18" REFLEX LOADED ACTIVE SUBWOOFER

<b>Amplifier Protection</b>	Thermal limiting, Digital compressor
<b>Driver Protection</b>	Short circuit protection
<b>Power unit Protection</b>	Primary AC mains overcurrent protection, Primary AC mains overvoltage protection
<b>Dimensions (WxHxD)</b>	661x535x536,5 mm
<b>Weight</b>	32.3 kgs
<b>What's in the box</b>	XPRS1182S x 1 (not sold as a pair), Powerd cord, Quick start guide, Important Safety Precautions