



GALA-630XW

6.5" 2-WAY COAXIAL CEILING SPEAKER

GALA X Series offers powerful and accurate coaxial loudspeakers with woofer diameters ranging from 5,25" to 8", and powers from 20W to 40W RMS. They can be used with standard 70/100V professional amplifiers, and provide transparent and brilliant sound. They are therefore suitable for any application of music distribution at higher volume levels.

The housing of GALA X speakers is made of high quality ABS. They also feature 0.5" Mylar-dome tweeters, polypropylene enforced woofers, and aluminum removable grille, which make these speakers suitable for humid environments.

Installation is very easy, thanks to the quick mounting system with 4 screws. These screws are hidden behind the grill, and offer an elegant and minimalist design. The built-in line transformers allow the use with 70/100V lines, and offer two power taps to better adapt to different speaker arrangement and amplifier powers. They come in white color, but can be painted in any color.

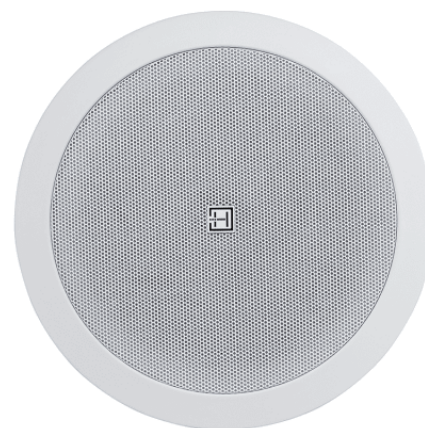

GALA-630XW

6.5" 2-WAY COAXIAL CEILING SPEAKER

PRODUCT DETAILS

KEY FEATURES

2-Way Coaxial Loudspeaker

6.5" (165 mm) Woofer

30W RMS Power

High Excursion Polypropylene Woofer

Mylar-dome Precision Tweeter

Built-in 70/100V Line Transformer

Quick Mounting System

Paintable Grille and Frame

SPECIFICATIONS

Speaker Type	2-Way Passive, Coaxial
Line Voltage	70V/100V
Line Transformer	Built-in, 2 power taps
100V Power	15W/30W
70V Power	7.5W/15W
Frequency Response (-10dB)	67Hz-18.5kHz
Sensitivity (1w/1m)	88dB
Woofer	6.5" (165mm), PP cone
Tweeter	0.5" (13mm), Mylar dome
Housing	PP, paintable
IP Rate (speaker installed)	IP54

GALA-630XW

6.5" 2-WAY COAXIAL CEILING SPEAKER

Mounting	Quick mounting system with 4 screws
Grille	Perforated steel with acoustic transparent foam inside, paintable
Color	White
Cutout Size	Ø 202 mm
Product Size (WxDxH)	Ø 233 x 95 mm
Speaker Weight	1.26 kg
Packing Size (WxDxH)	238 x 100 x 238 mm
Packing Weight	1,4 kg