


KIRA18SC

18" CORNER MOUNT PREMIUM SUBWOOFER, 1.000 W (RMS)

The KIRA18SC subwoofer is specifically designed for installation in corners. The technical base is a heavy-duty 18" transducer with an impressive 4" voice coil. Thus the KIRA18SC is extremely powerful, works installed at very low frequencies from 25 Hz and is a real problem solver for architecturally demanding sound reinforcement applications. The triangular design enables an installation in corners, both on walls and on ceilings. Once installed in a corner, the surfaces of a wall or a ceiling couple acoustically and work similar as a large horn. This coupling strengthens the efficiency of the subwoofer significantly and enlarges the frequency range down to very low 25 Hz. The efficiency of the higher bass frequencies is adjusted by a matching controller preset. Thus, the KIRA18SC provides an amazingly fundamental subwoofer experience. The mounting kit is included in the delivery. The metal frame has integrated rubber pads, which provide an acoustic decoupling of walls and ceilings. The mounting kit allows a very comfortable assembly of the subwoofer and can be also used as useful drilling template. Firstly, the frame can be attached to the wall or ceiling. Secondly, the KIRA18SC can be inserted and screwed into the frame. The chassis of the KIRA18SC is constructed from 15 mm plywood (birch) and covered with black texture finish. The cabinet is equipped with a front grill with transparent charcoal foam backing. Two speakon connectors (NL4) are mounted at the rear side of the chassis for signal input (input) and signal link (link). The power rating of the KIRA18SC is 1.000 W (RMS), the impedance is 8 ohms.

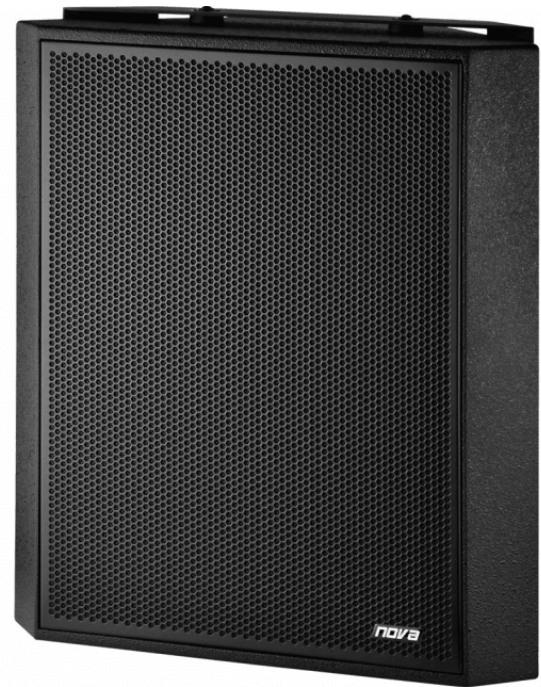

KIRA18SC

18" CORNER MOUNT PREMIUM SUBWOOFER, 1.000 W (RMS)

PRODUCT DETAILS

KEY FEATURES

Unique triangular design

High performance 18" transducer with 4" voice coil

Mounting frame included in delivery (as standard)

SPECIFICATIONS

System Type	18", subwoofer, triangular design
Frequency Range (-10 dB)	Freefield
Frequency Response (± 3 dB)	Freefield
Coverage Pattern	Omni, hornloaded at corner mount
HF Horn	n/a
Crossover Modes	Active
Crossover Frequency	n/a
Power Rating (Continuous**/Program)	1000 W/2000 W
Maximum SPL ***	134 dB SPL peak
System Sensitivity (1w/1m)	98 dB SPL
LF Driver	1 x NOVA 18/1000 EL, 4" voice coil woofer
LF Nominal Impedance	8 ohms (passive)
MF Driver	n/a
MF Nominal Impedance	n/a

KIRA18SC

18" CORNER MOUNT PREMIUM SUBWOOFER, 1.000 W (RMS)

HF Nominal Impedance	n/a
Active Tunings	External Signal Processing
Enclosure	15 mm, plywood (multi layer)
Suspension / Mounting	prepared for mounting kit (included)
Transport	n/a
Finish	Black lacquer finish
Grille	Powder coated, black, perforated steel with acoustic transparent charcoal foam backing, NOVA logo
Input Connectors	2 x Neutrik® Speakon® NL4 2+/2- (1+/1-linked from input to output)
Dimensions (W x H x D)	618 mm x 700 mm x 315 mm
Net Weight	29 kg
Accessories	Mounting frame, included in delivery as standard